



# 400 Series

## 404D-22TA

### Compact Industrial and Construction Power

49.3 kW/66.1 bhp @ 2800 rev/min



The Perkins 400D range has been developed in consultation with our marketplace. This 2.2 litre, 4 cylinder, turbocharged, air charge cooled engine is a new product to the 400 Series product line-up. The 404D-22TA becomes the flagship model in the range offering an increase in the power available from this compact, lightweight range of engines whilst maintaining all the customer benefits they can experience from other products in the range.

#### Ultra-compact power

- The neatly installed side mounted turbocharger position provides additional power with minimum impact on package size making fitment into machines easier
- Up to 45.5 kW from an engine envelope of 0.25 m<sup>3</sup>

#### Clean and quiet

- Noise levels have been kept to a minimum
- Subjective harshness has been carefully controlled making the engine sound even quieter

#### Durable power

- Product design and process improvements enhance both engine reliability and durability
- An improved governor and compliance testing delivers reliability with 6,000 hours durability
- A standard 2 year warranty demonstrates our confidence in durability and reliability

#### Low operating costs

- Approved for operation on biodiesel\* concentrations of up to 20%
- Oil and filter changes are now set at 500 hours as standard
- Engine durability and reliability, the warranty offering, and ease of installation combine to drive down the cost of ownership

#### Product support

- Through an experienced global network of distributors and dealers, fully trained engine experts deliver total service support around the clock, 365 days a year. They have a comprehensive suite of web based tools at their fingertips, covering technical information, parts identification and ordering systems, all dedicated to maximising the productivity of your engine
- Perkins actively pursues product support excellence by insisting our distribution network invest in their territory to provide you with a consistent quality of support across the globe
- Throughout the entire life of a Perkins engine, we provide access to genuine OE specification parts giving 100% reassurance that you receive the very best in terms of quality for lowest possible cost... wherever your Perkins powered machine is operating in the world

Certified to Stage IIIA and Tier 3 (>37 kW).

The 400 Series engine family continues to set new standards in the compact engine market. Developed alongside customers to fulfil their needs in the construction, materials handling, agricultural/turf, gen set and compressor markets, it is another class leading diesel range from Perkins.

Built to the most demanding standards, the 400D engines meet all the requirements of the off-highway emissions legislation for EC Stage IIIA/USA EPA Tier 3 and beyond.

Long 500 hour service intervals, a two year standard warranty, low noise and harshness, and a wide range of options make the 400 Series range the complete solution for compact power needs.

The 404D-22TA is a powerful but quiet 2.2 litre turbocharged unit delivering impressive performance with low operating costs in a small efficient package ideal for a range of off-highway applications.

Performance Data	Gross Intermittent (ISO/TR 14396)	Speed (rev/min)
Power Output (kW)	49.3	2800
Power Output (bhp)	66.1	2800
Peak Torque (Nm)	208.4	1800
Peak Torque (lbf ft)	153.7	1800

Power output for a run-in engine after 60 hours.

\*Subject to conformance with ASTM D6751 and EN14214.

Photographs are for illustrative purposes only and may not reflect final specifications.

All information in this document is substantially correct at time of printing and may be altered subsequently

Publication No. 1821/05/09 Produced in England ©2007 Perkins Engines Company Limited

# 400 Series

## 404D-22TA

### Engine Specification

- Cast iron engine block
- Flywheel and flywheel housing
- Fuel injection pump
- Split element fuel filter
- Glow plug starting aid
- Lub oil sump
- Spin on lub oil filter
- Inlet manifold
- Cast iron exhaust manifold – side outlet
- Coolant pump belt driven
- Starter motor 12 volt
- Alternator 12 volt 65 amp
- ESOS
- Lub oil pressure switch
- Coolant temperature switch
- SAE A PTO
- Choice of cooling fans
- High and low fan positions
- Electronic controlled governing as an option



### General Data

Number of cylinders	4 in-line
Bore and stroke	84 x 100 mm
Displacement	2.2 litres
Aspiration	Turbocharged
Cycle	4 stroke
Combustion system	Indirect injection
Compression ratio	23:3:1
Rotation	Anti-clockwise viewed on flywheel
Cooling system	Liquid
Total lubrication capacity	10.6 litres
Total coolant capacity	3.6 litres
Dimensions	Length 662 mm Width 489 mm Height 698 mm
Dry weight	194 kg

Final weight and dimensions will depend on completed specification.

### Option Groups

A selection of optional items is available to enable the customer to prepare a specification precisely matched to their needs.

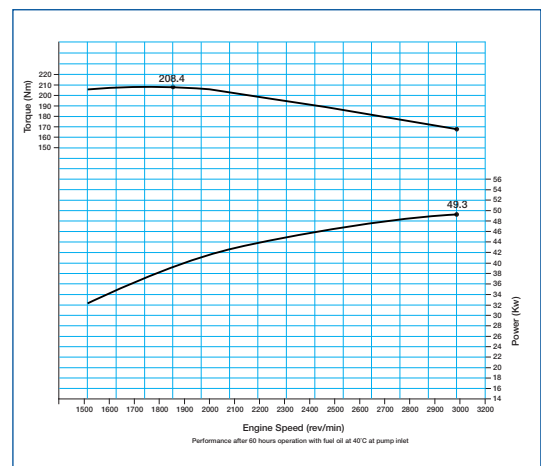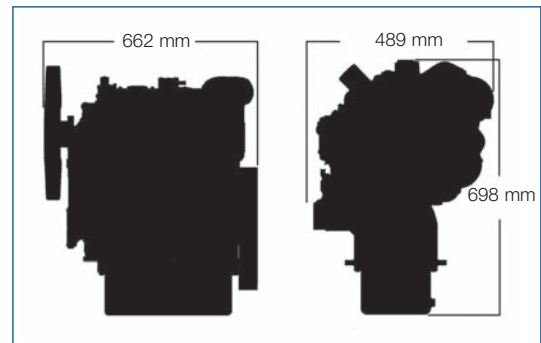

Note: lower speed ratings cannot be read from this curve.



**Perkins Engines Company Limited**  
 Peterborough PE1 5NA  
 United Kingdom  
 Telephone +44 (0)1733 583000  
 Fax +44 (0)1733 582240  
[www.perkins.com](http://www.perkins.com)

All information in this document is substantially correct at time of printing and may be altered subsequently  
 Publication No. 1821/05/09 Produced in England ©2007 Perkins Engines Company Limited

Distributed by